


## OSA ELECTRONICS DACBERRY 400 S

### Features

- Up to 96kHz/32bits
- 102dB SNR DAC, 92dB SNR ADC
- THD+N @1kHz – 0.006 %
- Integrated DSP
- 3D Effects and De-Emphasis
- Low-Noise design with isolated Digital and Analog parts
- Board leaves all the USB ports free
- Compatible with Raspberry Pi and others with the same GPIO

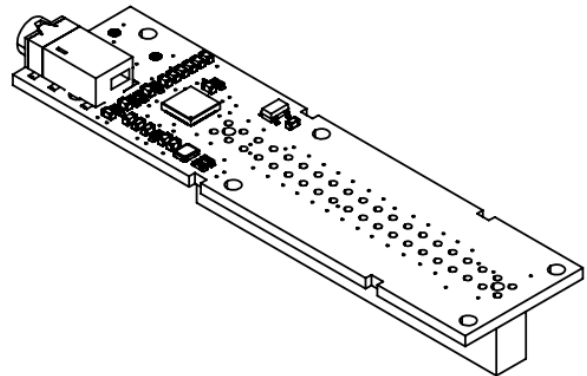


Specifications		
Model		DBR400S
DAC	-	102dB SNR @96kHz / 32 bits
ADC	-	92dB SNR @96kHz / 32 bits
THD+N		0.006 % @1kHz
Features	-	<ul style="list-style-type: none"> <li>- Integrated DSP</li> <li>- 3D, Bass, Treble, EQ, or De-Emphasis Effects</li> <li>- Ultra-Low-Power Mode With Passive Analog</li> <li>- Bypass</li> <li>- Programmable I/O Analog Gains</li> <li>- Automatic Gain Control (AGC) for Record</li> <li>- Programmable Microphone Bias Level</li> <li>- Headset auto-detect</li> <li>- High Power Outputs</li> </ul>
Inputs	-	1x mic in on headset/headphone connector
Outputs	-	1x stereo on headset/headphone connector
Top header connector	-	NOT Included / NOT soldered
Case	-	NOT Included
Weight	-	25g
Size WxHxD	-	77 x 20x 20 mm

## GPIO Usage


Raspberry Pi 400 uses the same GPIO Pinout like the rest of Raspberry Pi devices, however, be aware that the Pin 1, is located on the right-top side.

Pi GPIO for reference:

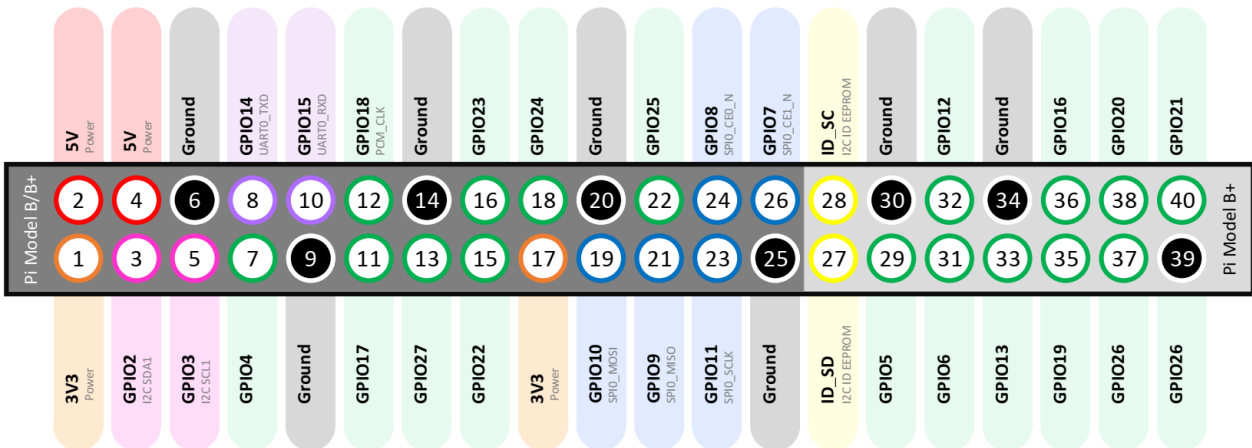

DACBerry 400 Series:



- GPIOs 2-3 (Pins 3, 5) are used by our products for configuration. If you are experienced with I2C, you might add other slave devices. If you are a novice, we don't recommend this at all.
- GPIOs 18-21 (Pins 12, 35, 38 and 40) are used for the sound interface. You can't use them for any other purpose.
- GPIO 26 (Pin 37) is used for Board reset function. You can't use it for any other purpose.

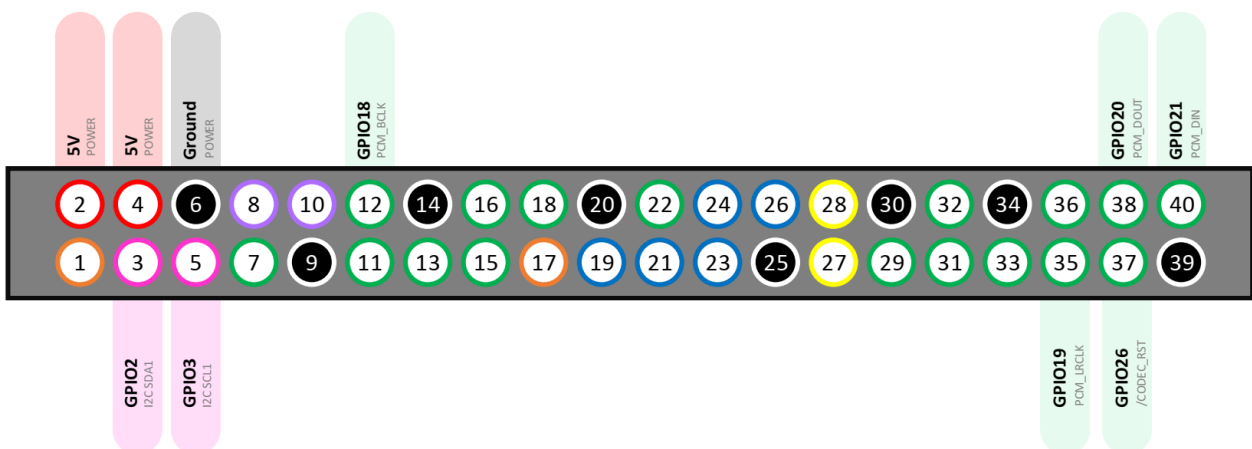

## Mechanical Specifications

The DACBerry 400 S is a compact 77 × 20 x 20mm board.

- 4 × M2 Mounting holes
- PCB thickness 1.6mm ± 10%

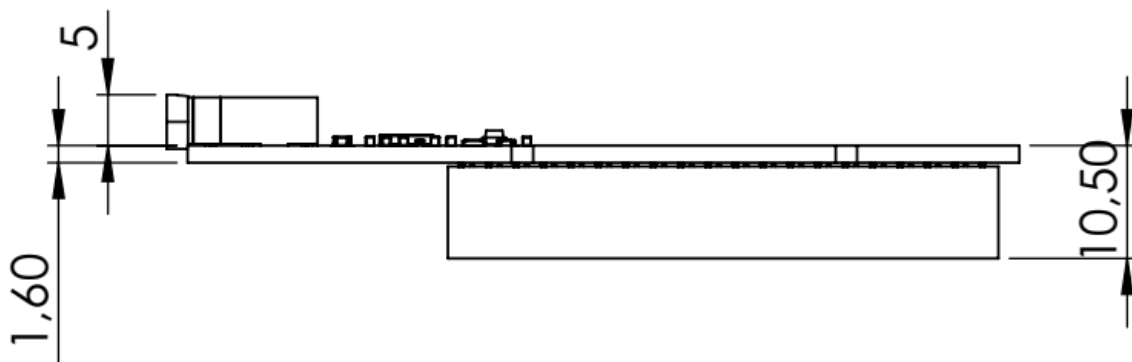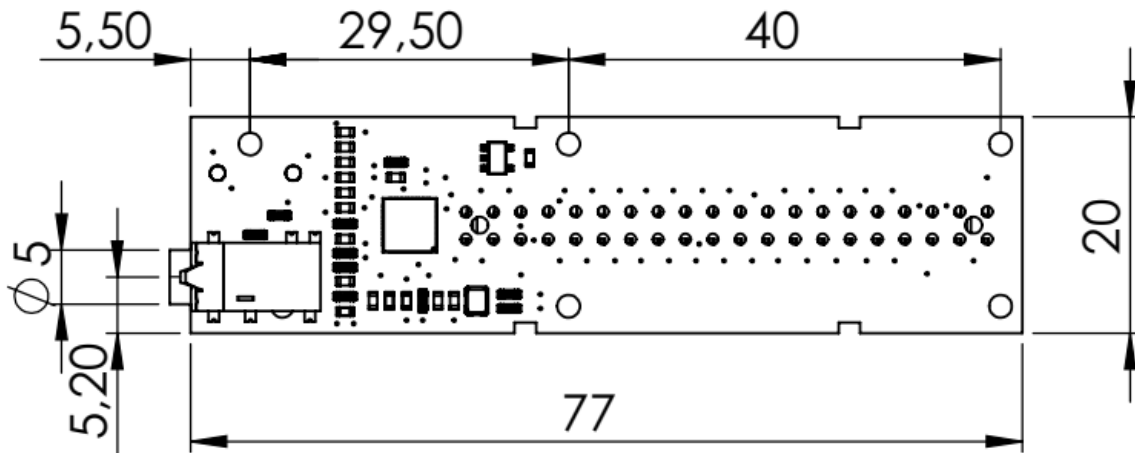

\*All dimensions in mm

## Packaging

DACBerry 400 Series boards are supplied in individual cardboard boxes. These have an internal ESD coating so that a separate ESD bag is not required. This packaging is recyclable and reduces waste.

## EAN-13



## Certifications

DACBerry 400 Series complies the following certifications:



## Support

For support and/or device configuration, please see the documentation tab on the DACBerry 400 product page, inside the OSA Electronics website.

[osa.to/fy8l](https://osa.to/fy8l)

